



LH SERIES TELEMTRY LOAD HOOK

Imes LH Load Hook range combines accurate load measurement, Radio frequency telemetry with a simple retrofit hook for single or multi line applications on cranes, hoists and winches


Display Specification

Display	5 digit, 10mm high numeric 7 segment LCD
Keyboard	6 key tactile with limited menu system
Battery	rechargeable, app. 50 hrs continuous
Standard	On/Off, tare, readout in kg, lb, Tonne, Ton



Options:

- Real time clock and date
- RS232 I/O (printer or PC interface etc)
- Large character external readout
- Dynamic weighing
- Data recording
- Multi load cell selection and summation
- Bespoke Reseller Labels (for quantity)

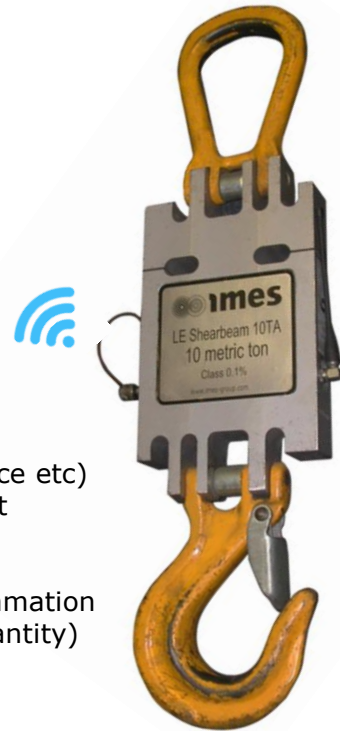

Range 0.5 - 40 tonne

Cell Specification

Material	Aircraft Grade Anodised Aluminium
Range	50metre (250m extended antennae)
Class accuracy	Class A +/- 0.1% FSD . Standard +/- 0.25%
Temperature range	-20 to +70°C
Battery life active	Approx. 250-1000 hrs Long Life
Safety factor	5:1
Environmental	IP67 (IP68 optional)

