

SL Wireless Load Shackle


Simple | Rugged| Accurate



Class Leading Specification:

- Capacities from 3.5tonne to 1500tonne
- Ultra rugged design
- Working Overload Range 200%
- Factor of Safety 5:1, (7: 1 for Mil Spec.)
- Quality VB Green Pin or Crosby Super Shackles
- High Accuracy - Standard $\pm 0.5\%$
- Temperature Range -20°C to $+70^{\circ}\text{C}$
- Frequency 2.4GHz (standard) 418MHz, 433MHz, 914MHz
- Communication range standard 600m 2.4GHz
- Excellent Ingress Protection - standard IP67 (IP68 subsea 5000m)
- Battery life >1000 hours
- ATEX/IECEX approved version
- HERO Approved wireless communications
- Wireless accessories - handheld displays, PC software, large displays

Model	Capacity	A	B	C	D	Weight
SL03.5T	3.5 tonne	27	19	64	43	3.5
SL05T	4.75 tonne	31	22	76	51	4kg
SL012T	12 tonne	51	35	115	83	10kg
SL025T	25 tonne	73	51	178	127	20 kg
SL035T	35 tonne	83	57	197	146	29 kg
SL050T	50 tonne	105	70	267	184	51 kg
SL085T	85 tonne	127	83	330	200	76 kg
SL120T	120 tonne	133	95	372	229	130 kg
SL150T	150 tonne	140	108	368	254	163 kg
SL200T	200 tonne	175	130	500	290	250 kg
SL250T	250 tonne	200	140	540	305	305 kg
SL300T	300 tonne	200	150	600	305	410 kg
SL X	500,800, 1000 tonne	Sizes on Request				

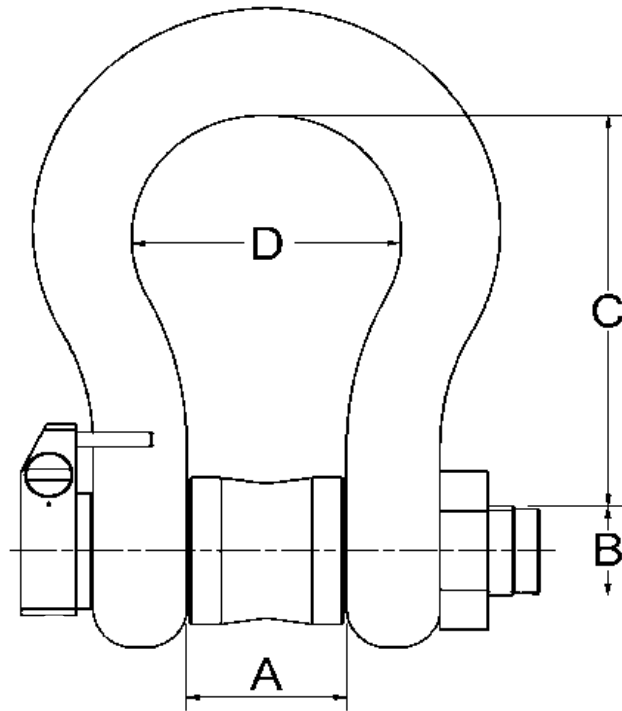

Handheld display, PC software, I-Log flat panel, Large LED display

